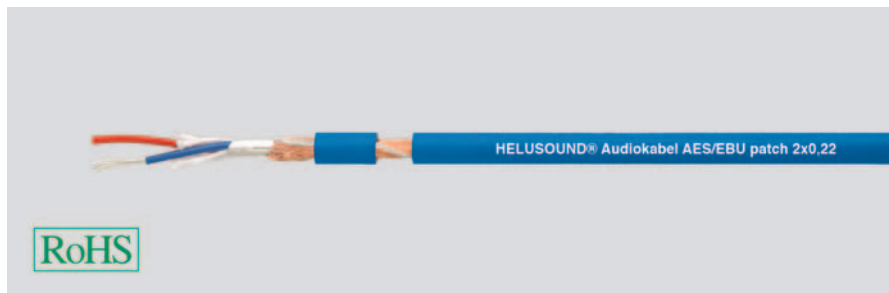


Audio & Light

AES/EBU & DMX patch cable

HELULIGHT[®]


Type

Cable structure

Conductor material:
Core insulation:
Core colours:
Stranding element:
Sheath material:
Cable external diameter:
Sheath colour:

DMX cables

2x0,22

Copper, tinned
Cell PE
rd, bu
2 cores with 1 filler
PVC
approx. 5,0 mm
blue

Electrical data

Characteristic impedance:
Conductor resistance, max.:
Insulation resistance, min.:

110 Ohm
80 Ohm/km
5 GOhm x km

Technical data

Weight:
Min. bending radius for laying:
Operating temperature range min.:
Operating temperature range max.:
Copper weight:

approx. 33 kg/km
50 mm
-30°C
+70°C
14,0 kg/km

Part no.

400031

Dimensions and specifications may be changed without prior notice.

Application

The 2-core HELUSOUND[®] AES/EBU & DMX patch cable is foil shielded and optimally protected against external interference by its copper spiral screen. This cable is suitable for indoor use for permanent laying for the control of lighting systems or for patching in studio technology.