


MEGAFLEX® 500 halogen-free, flame retardant, oil-resistant, UV-resistant, flexible, meter marking

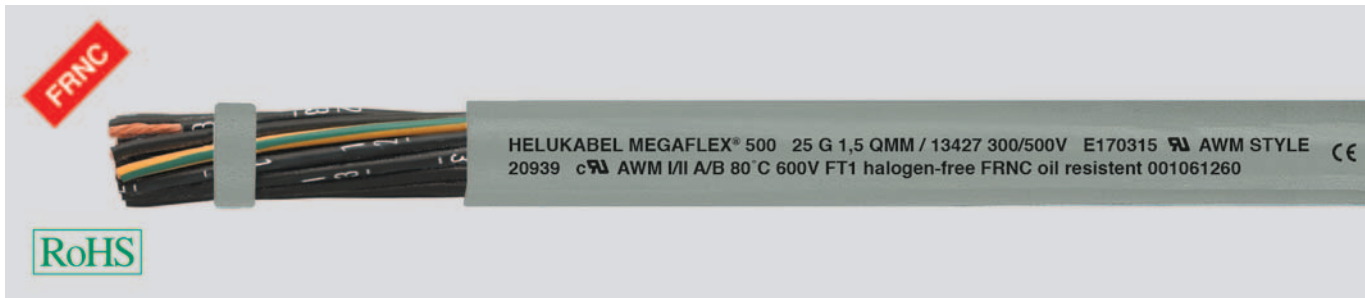

Technical data

- Halogen-free flexible control cable adapted to
DIN VDE 0285-525-3-11/
DIN EN 50525-3-11,
to UL-Style 20939, UL-Std.758
- **Temperature range**
flexing -30°C to +80°C
fixed installation -40°C to +80°C
- **Nominal voltage**
U₀/U 300/500 V
UL/CSA 600 V
- **Test voltage** 3000 V
- **Minimum bending radius**
flexing 10x cable Ø
fixed installation 4x cable Ø
- **Flexibility**
Alternate bending test acc. to
DIN VDE 0473-396 / DIN EN 50396

Cable structure

- Bare copper-conductor, to
DIN VDE 0295 cl.5, fine-wire,
BS 6360 cl.5, IEC 60228 cl.5
- Core insulation of halogen-free
special polymer
- Core identification to DIN VDE 0293
black cores with continuous white
numbering
- GN-YE conductor, 3 cores and above
in the outer layer
- Cores stranded in layers with
optimal lay-length
- Outer sheath of halogen-free
special polymer
- Sheath colour grey (RAL 7001)
- with meter marking
- **LSOH**= Low Smoke Zero Halogen

Note

- G = with green-yellow conductor
x = without green-yellow conductor (OZ)
- Also available as a 0,6/1 kV cable
MEGAFLEX® 600
- AWG sizes are approximate equivalent
values. The actual cross-section is in mm².
- screened analogue type:
MEGAFLEX® 500-C, confer page 398

Properties

- Highly flame-retardant
- Resistant to oils and greases
- Resistant to UV and weathering
- Hydrolysis resistant
- Flexible, abrasion- and wear-resistant
- Ozone-resistant, recyclable
- The materials used in manufacture are
cadmium-free and contain no silicone
and free from substances harmful to
the wetting properties of lacquers

Tests

- Flame test acc. to DIN VDE 0482-332-3-24,
BS 4066 part 3, DIN EN 60332-3-24,
IEC 60332-3-24 (previously DIN VDE 0472
part 804 test method C)
- Self-extinguishing and flame retardant
acc. to DIN VDE 0482-332-1-2,
DIN EN 60332-1-2 / IEC 60332-1 (previously
DIN VDE 0472 part 804 test method B),
CSA FT 1
- Corrosiveness of combustion gases
acc. to NF X 10-702
- Halogen-free acc. to DIN VDE 0482
part 267 / DIN EN 50267-2-1 / IEC 60754-1
(equivalent DIN VDE 0472 part 815)
- Smoke density acc. to DIN VDE 0482
part 1034-1+2, DIN EN 61034-1+2,
IEC 61034-1+2, BS 7622 part 1+2
(previously DIN VDE 0472 part 816)
- Oil-resistant to DIN VDE 0473-811-404/
DIN EN 60811-404
- Hydrolysis-resistant to DIN EN 61234-1
- Ozone-resistant to
DIN VDE 0473-811-403/DIN EN 60811-403

Application

For fixed installation or flexible application, with free movements without forcing which do not constantly recur and without tensile stress, for high mechanical strain. As a measuring and control cable primarily in machinery and plant construction, in air-conditioning systems, at the warehouse and conveyor systems, in ship-building and in the renewable energies such as in the construction of wind power stations.

CE= The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x cross-sec. mm ²	AWG-No.	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km
13344	2 x 0,5	20	5,0	9,6	43,0
13345	3 G 0,5	20	5,3	14,4	50,0
13346	3 x 0,5	20	5,3	14,4	50,0
13347	4 G 0,5	20	5,7	19,0	60,0
13348	4 x 0,5	20	5,7	19,0	60,0
13349	5 G 0,5	20	6,2	24,0	71,0
13350	5 x 0,5	20	6,2	24,0	71,0
13351	7 G 0,5	20	7,4	33,6	84,0

Part no.	No. cores x cross-sec. mm ²	AWG-No.	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km
13352	8 G 0,5	20	8,0	38,0	101,0
13353	10 G 0,5	20	8,8	48,0	121,0
13354	12 G 0,5	20	9,1	58,0	142,0
13355	16 G 0,5	20	10,0	76,0	183,0
13356	18 G 0,5	20	10,7	86,0	204,0
13357	20 G 0,5	20	11,2	96,0	227,0
13359	25 G 0,5	20	12,7	120,0	283,0
13360	30 G 0,5	20	13,5	144,0	324,0

Continuation ►